
**SUPPLY SCOPE: Nudura ICF forms, accessories, pre-cut service, alignment hire and haulage as the quotation. ENGLAND - Building Regulations (LABC). 3rd-floor FFL ~8.23 m above the ground floor, below 11 m. 4 storeys incl. the attic (LABC warranty cap 3 - provider to confirm); Class 2A ties by the engineer. Precast floors, steels / transfer beams, roof structure, windows and timber partitions are shown in good faith for coordination only - engineer / specialists to design.**

**QUOTATION - NOT FOR CONSTRUCTION**

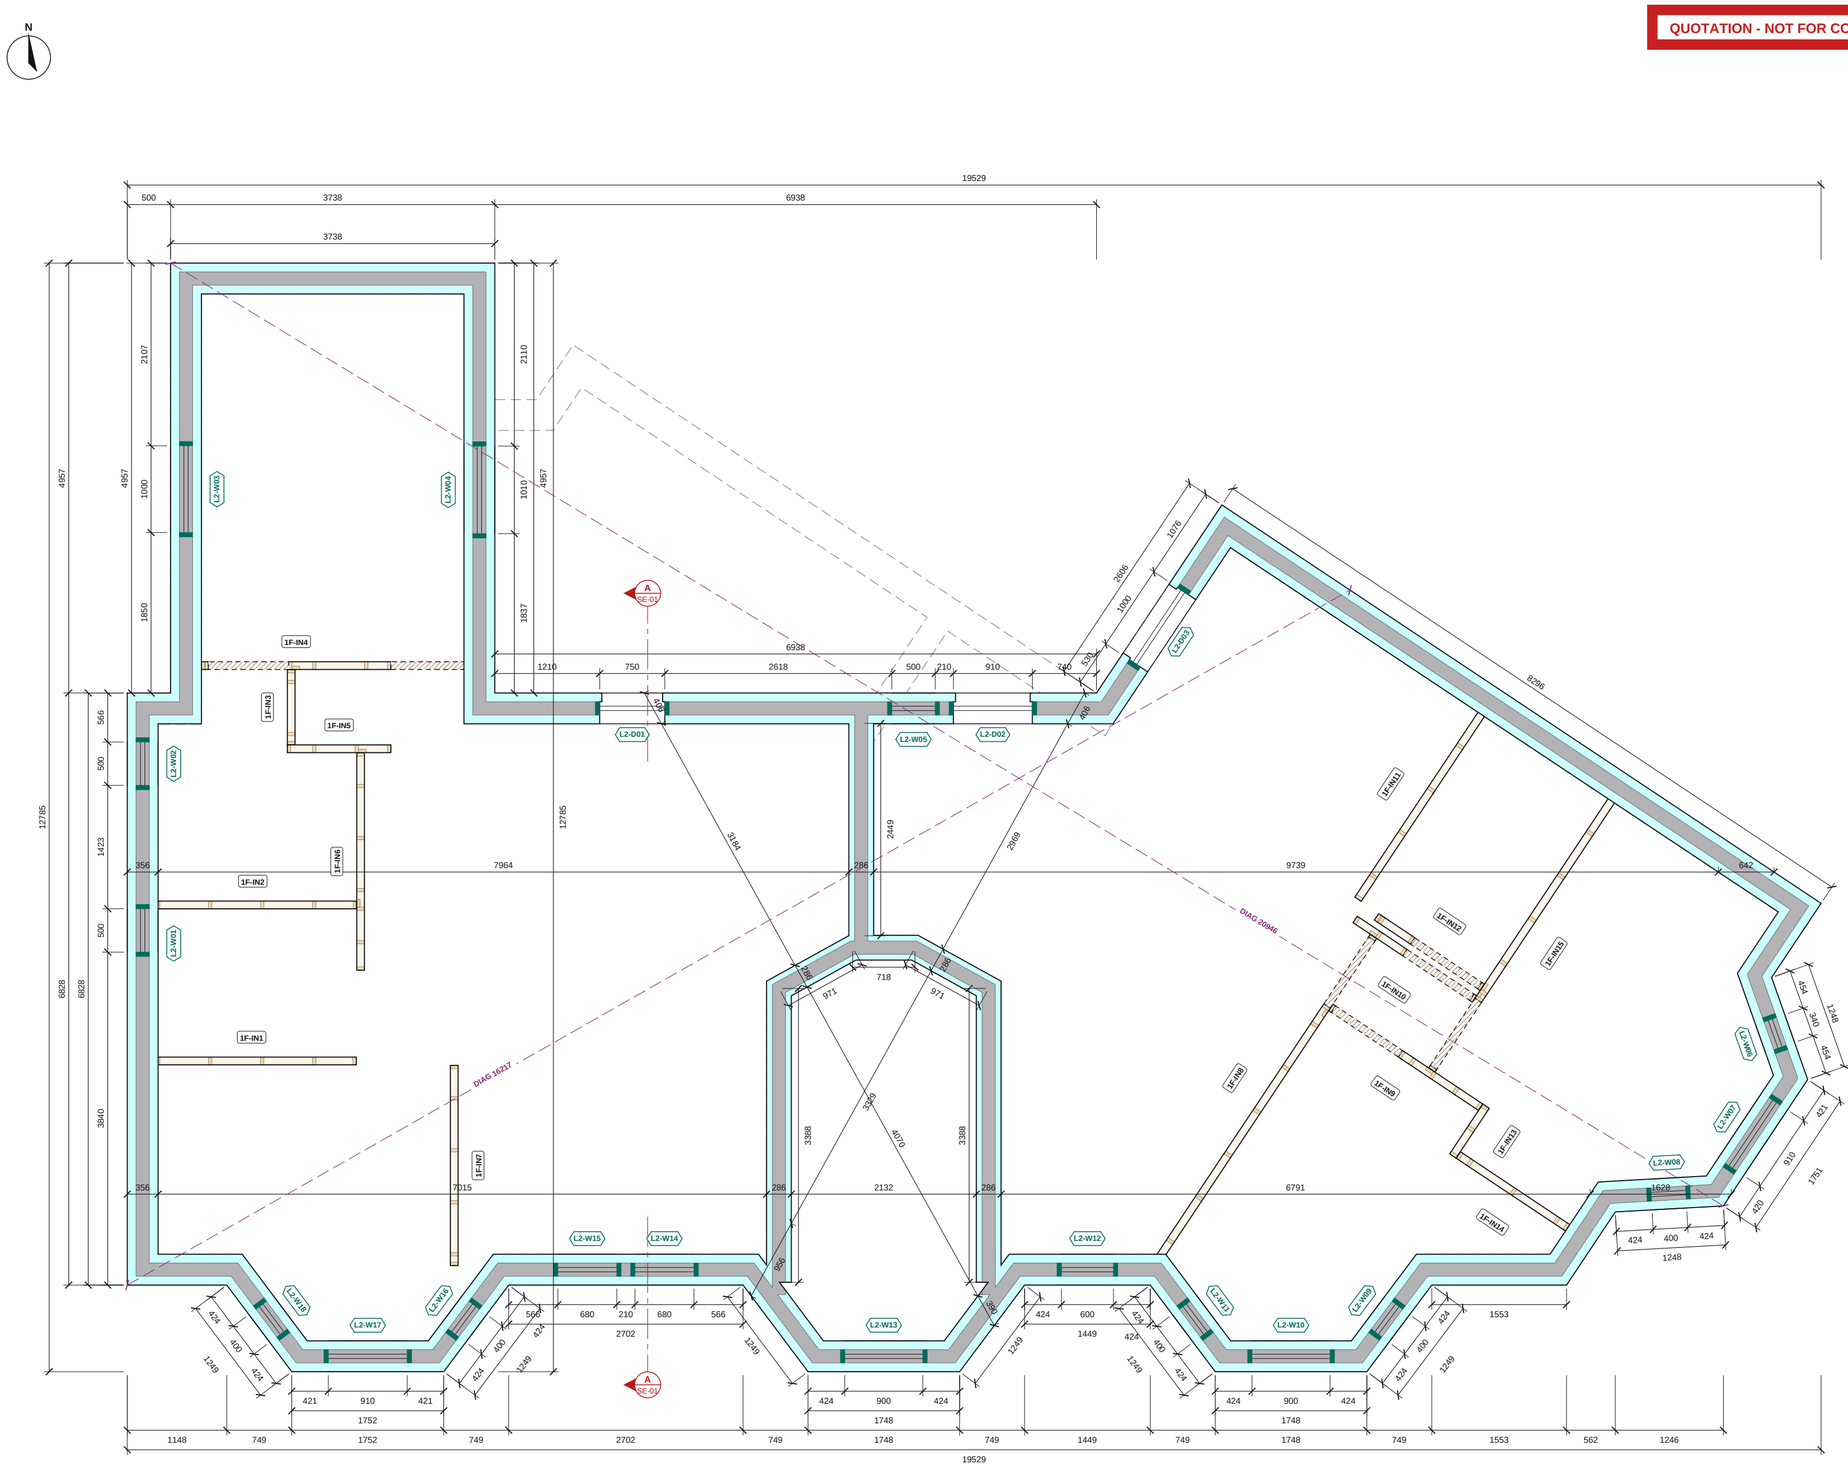


EPS insulation (Nudura form)
Concrete core
End cap at opening
Load-bearing masonry wall (context)
Timber frame partition panel, studs cut at plan level
Panel joint
Door opening in a timber partition (hatched through the door, head over dashed)
ICF walls of the level below (dashed)
Engineer's pier bars (n-H12 vertical bars in ICF pier) / WS wall starters
Setting-out check diagonal (external ICF corners)
Section line (see SE sheet)

## FIRST FLOOR ICF PLAN

Scale 1:50 @ A2 | Plan cut at +3143

0 1 2 3m

## FIRST FLOOR ICF SCHEDULES

### OPENING SCHEDULE

| Ref | Width | Height | Sill | Head | Lintel |
|---|---|---|---|---|---|
| L2-W01 | 500 | 1829 | +3200 | +5029 | - |
| L2-W02 | 500 | 1829 | +3200 | +5029 | - |
| L2-W03 | 1000 | 1829 | +3200 | +5029 | - |
| L2-W04 | 1010 | 1829 | +3200 | +5029 | - |
| L2-D01 | 750 | 2286 | +2743 | +5029 | - |
| L2-W05 | 500 | 1829 | +3200 | +5029 | - |
| L2-D02 | 910 | 2286 | +2743 | +5029 | - |
| L2-D03 | 1000 | 2286 | +2743 | +5029 | - |
| L2-W07 | 910 | 1829 | +3200 | +5029 | - |
| L2-W08 | 400 | 1829 | +3200 | +5029 | - |
| L2-W09 | 400 | 1829 | +3200 | +5029 | - |
| L2-W10 | 900 | 1829 | +3200 | +5029 | - |
| L2-W11 | 400 | 1829 | +3200 | +5029 | - |
| L2-W12 | 600 | 1829 | +3200 | +5029 | - |
| L2-W13 | 900 | 1829 | +3200 | +5029 | - |
| L2-W16 | 400 | 1829 | +3200 | +5029 | - |
| L2-W17 | 910 | 1829 | +3200 | +5029 | - |
| L2-W18 | 400 | 1829 | +3200 | +5029 | - |
| L2-W06 | 340 | 1829 | +3200 | +5029 | - |
| L2-W14 | 680 | 1829 | +3200 | +5029 | - |
| L2-W15 | 680 | 1829 | +3200 | +5029 | - |

Structural openings in the ICF; sill and head above GF FFL.

### NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. Dimensions to the ICF faces.
2. Levels above GF FFL. Sill / head = structural opening in the ICF.
3. No structural design yet (planning drawings). ICF per the quotation model: 6in XR35 external walls and foundation (2 courses on a strip footing), 6in Std separating walls (stair core + flat separating walls). Precast floors bear on the ICF core; transfer beams under the 1F north wall and the wing east wall, the indicative steels and the Class 2A ties for the engineer.
4. Lintel (L-n) and steel (B-n, C-1) marks from rev -, which takes precedence.
5. Masonry walls shown for context.

### REVISIONS

| REV | DATE | DESCRIPTION |
|---|---|---|
| - | 02.11.26 | Quotation issue |

Nudura™ BuildEase

| CLIENT | PROJECT |
|---|---|
| JAUS (via Tremco CPG UK) | Bromfelde Corner, 25 Bromfelde Road, London SW4 6PP |

DRAWING TITLE
**FIRST FLOOR ICF GENERAL ARRANGEMENT**
ICF walls, openings, lintels, steel over and engineer's notes

| SCALE | SIZE | DATE |
|---|---|---|
| 1:50 | A2 | 02.11.26 |
| DRAWN | CHECKED | APPROVED |
| TS | | |

| STATUS | DRAWING No. | REV |
|---|---|---|
| QUOTATION | ES26-087-GA-03 | - |

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.