
SUPPLY SCOPE: Nudura ICF forms, accessories, pre-cut service, alignment hire and haulage as the quotation. ENGLAND - Building Regulations (LABC). 3rd-floor FFL ~8.23 m above the ground floor, below 11 m. 4 storeys incl. the attic (LABC warranty cap 3 - provider to confirm); Class 2A ties by the engineer. Precast floors, steels / transfer beams, roof structure, windows and timber partitions are shown in good faith for coordination only - engineer / specialists to design.

QUOTATION - NOT FOR CONSTRUCTION

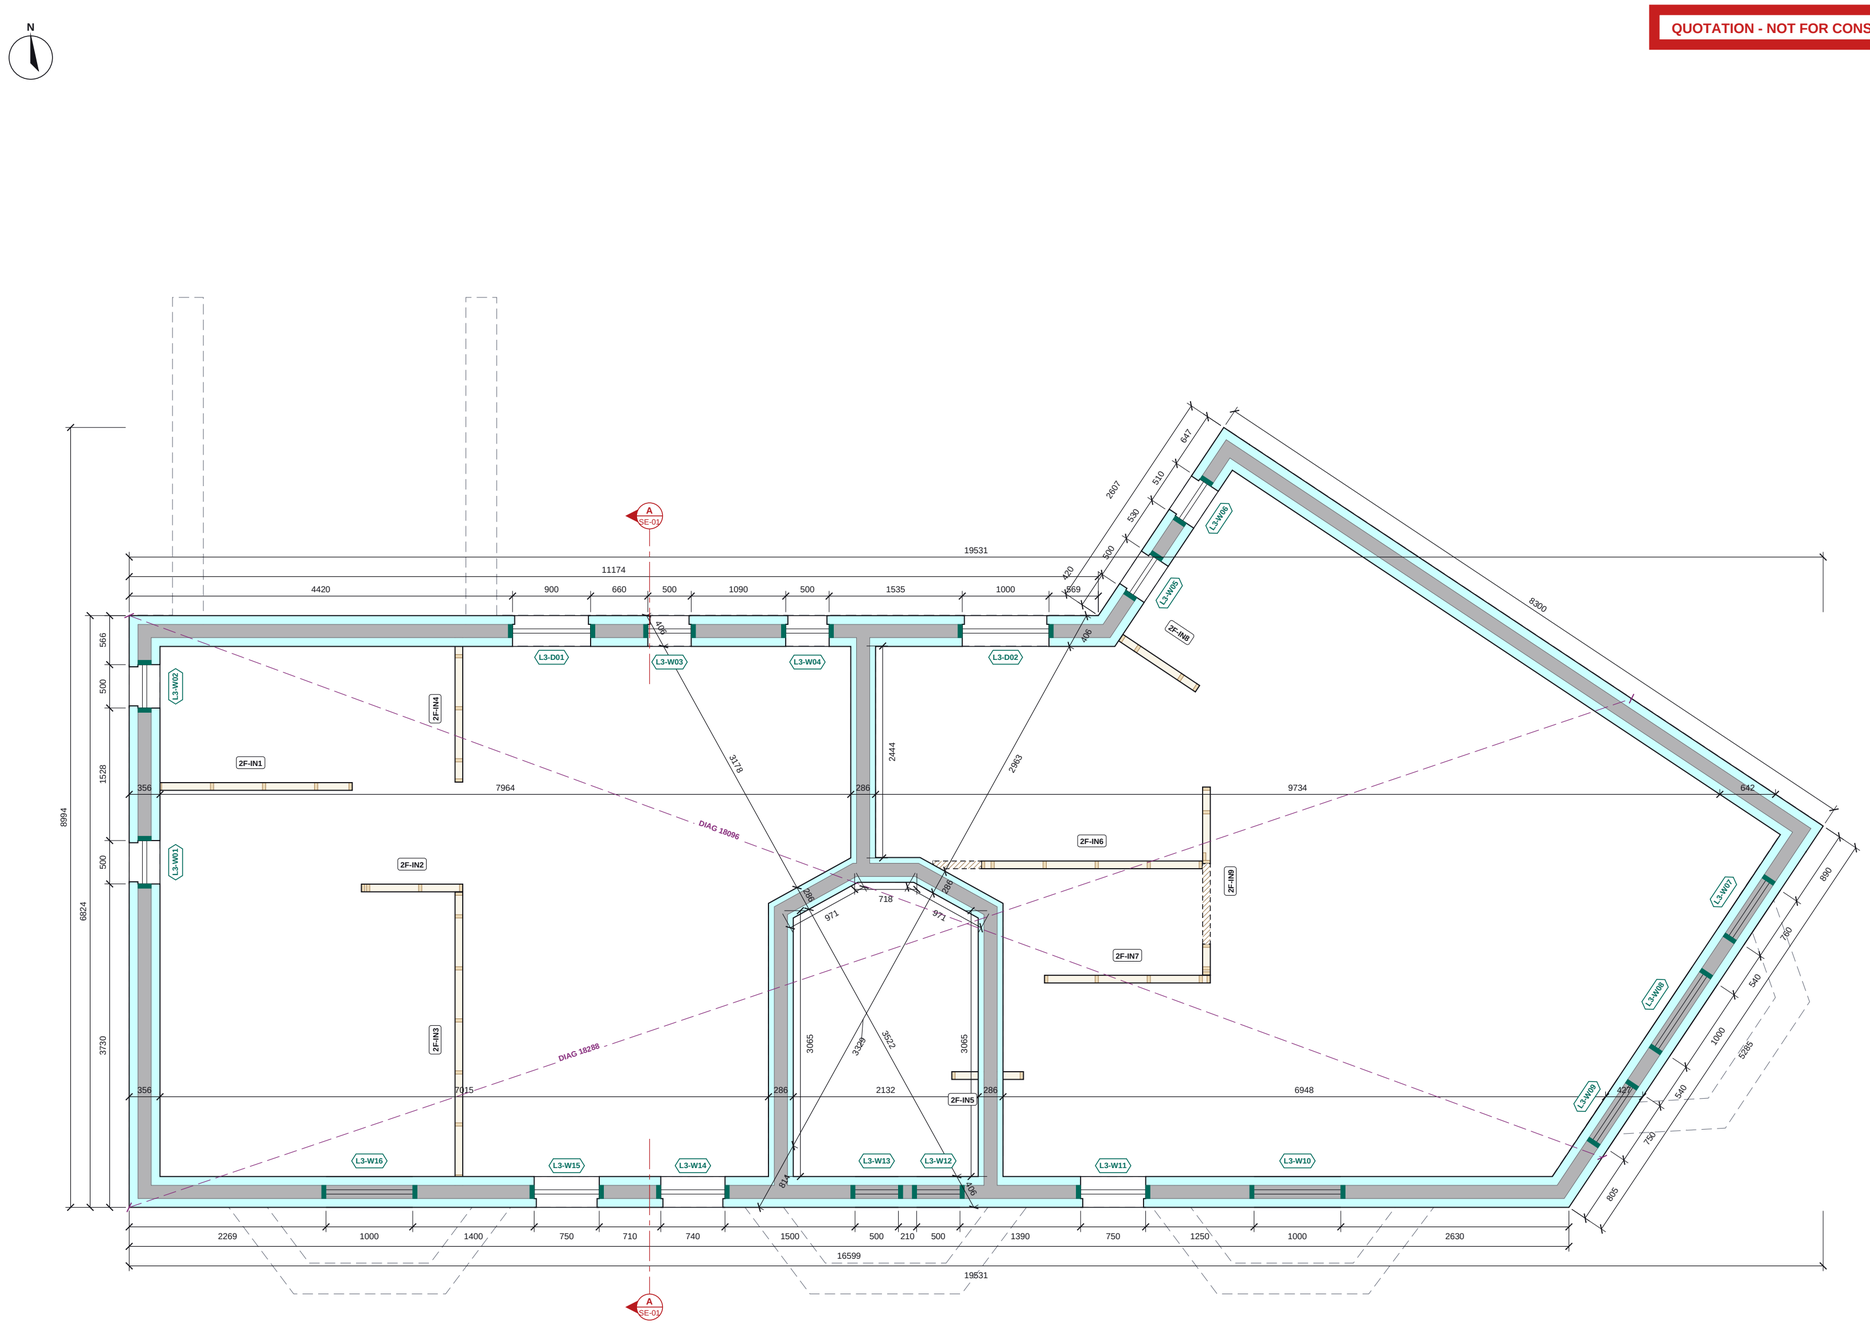

EPS insulation (Nudura form)
Concrete core
End cap at opening
Load-bearing masonry wall (context)
Timber frame partition panel, studs cut at plan level
Panel joint
Door opening in a timber partition (hatched through the door, head over dashed)
ICF walls of the level below (dashed)
Engineer's pier bars (n-H12 vertical bars in ICF pier) / WS wall starters
Setting-out check diagonal (external ICF corners)
Section line (see SE sheet)

SECOND FLOOR ICF PLAN

Scale 1:50 @ A2 | Plan cut at +6386

0 1 2 3m

SECOND FLOOR ICF SCHEDULES

OPENING SCHEDULE

Ref	Width	Height	Sill	Head	Lintel
L3-W01	500	1829	+5944	+7772	-
L3-W02	500	1829	+5944	+7772	-
L3-D01	900	2286	+5486	+7772	-
L3-W03	500	1829	+5944	+7772	-
L3-W04	500	1829	+5944	+7772	-
L3-D02	1000	2286	+5486	+7772	-
L3-W05	500	1829	+5944	+7772	-
L3-W06	510	1829	+5944	+7772	-
L3-W07	760	1372	+6401	+7772	-
L3-W08	1000	1372	+6401	+7772	-
L3-W10	1000	1372	+6401	+7772	-
L3-W11	750	1829	+5944	+7772	-
L3-W12	500	1372	+6401	+7772	-
L3-W13	500	1372	+6401	+7772	-
L3-W14	740	1829	+5944	+7772	-
L3-W15	750	1829	+5944	+7772	-
L3-W16	1000	1372	+6401	+7772	-
L3-W09	750	1372	+6401	+7772	-

Structural openings in the ICF; sill and head above GF FFL.

NOTES

1. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. Dimensions to the ICF faces.
2. Levels above GF FFL. Sill / head = structural opening in the ICF.
3. No structural design yet (planning drawings). ICF per the quotation model: 6in XR35 external walls and foundation (2 courses on a strip footing), 6in Std separating walls (stair core + flat separating walls). Precast floors bear on the ICF core; transfer beams under the 1F north wall and the wing east wall, the indicative steels and the Class 2A ties for the engineer.
4. Lintel (L-n) and steel (B-n, C-1) marks from rev -, which takes precedence.
5. Masonry walls shown for context.

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	Quotation issue

Nudura™ BuildEase

CLIENT	PROJECT
JAUS (via Tremco CPG UK)	Bromfelde Corner, 25 Bromfelde Road, London SW4 6PP

DRAWING TITLE
SECOND FLOOR ICF GENERAL ARRANGEMENT
ICF walls, openings, lintels, steel over and engineer's notes

SCALE	SIZE	DATE
1:50	A2	02.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-087-GA-04	-

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.