
**SUPPLY SCOPE: Nudura ICF forms, accessories, pre-cut service, alignment hire and haulage as the quotation. ENGLAND - Building Regulations (LABC). 3rd-floor FFL ~8.23 m above the ground floor, below 11 m. 4 storeys incl. the attic (LABC warranty cap 3 - provider to confirm); Class 2A ties by the engineer. Precast floors, steels / transfer beams, roof structure, windows and timber partitions are shown in good faith for coordination only - engineer / specialists to design.**

**QUOTATION - NOT FOR CONSTRUCTION**

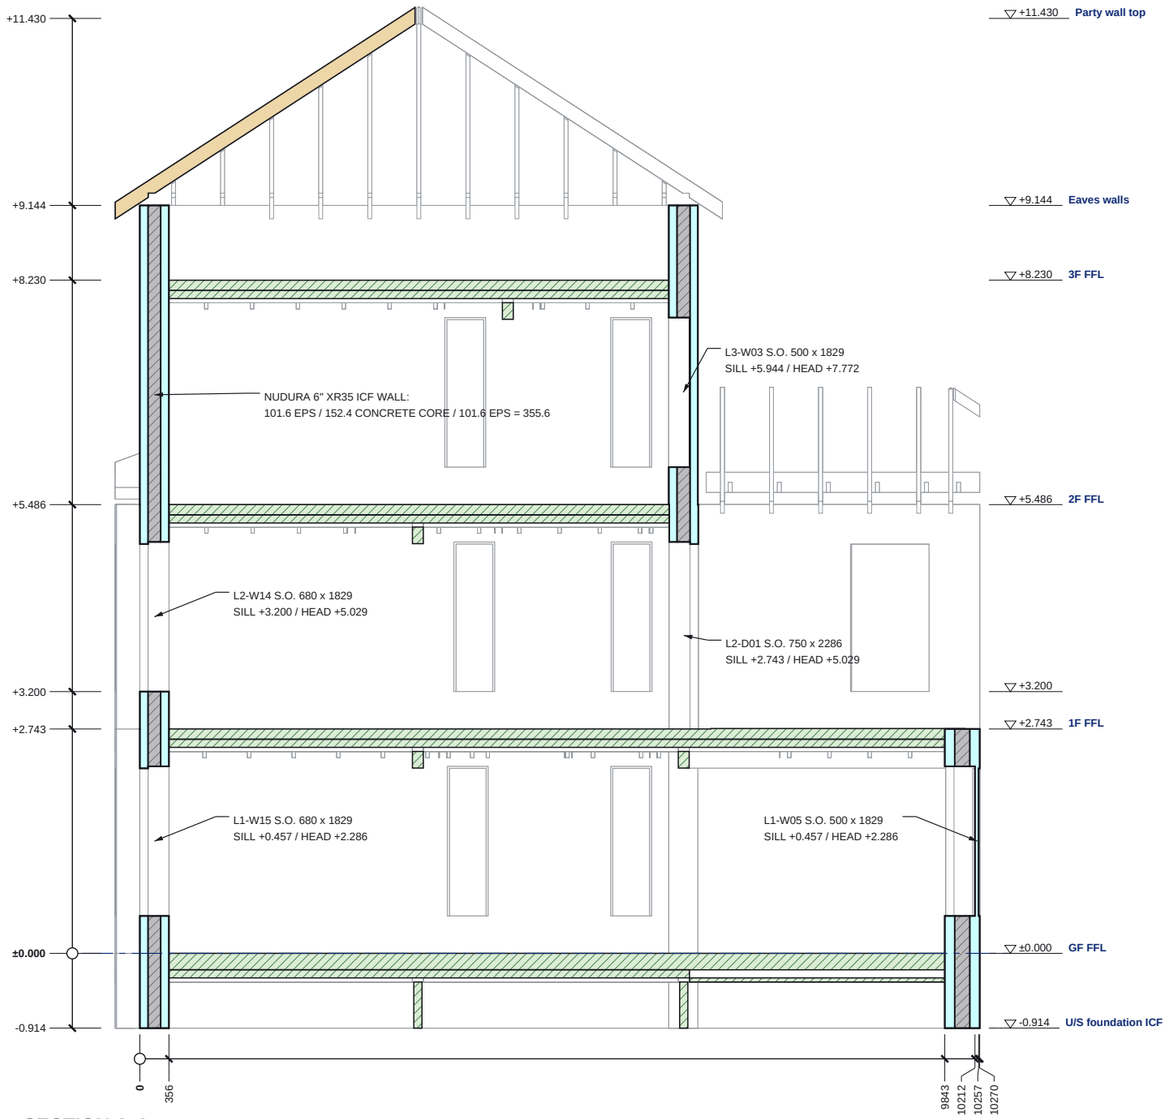


## SECTION A-A

Scale 1:75 @ A3 | Looking west; levels above GF FFL

ICF EPS (cut)
ICF concrete core / RC (cut)
Steel (cut)
Timber (cut)
Masonry wall (cut)
Beyond the cut (line work)

0 1 2 3 4m


Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

## SECTION A-A SCHEDULES

### LEVELS ON THIS SECTION

| Level | FFL |
|---|---|
| U/S foundation ICF | -0.914 |
| GF FFL | ±0.000 |
| 1F FFL | +2.743 |
| top of ICF W22 | +3.200 |
| 2F FFL | +5.486 |
| 3F FFL | +8.230 |
| Eaves walls | +9.144 |
| Party wall top | +11.430 |

### SECTION KEY

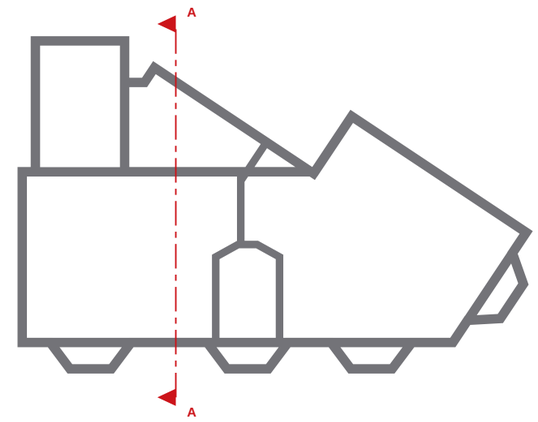


### NOTES

1. Section A-A is a BuildEase ICF section (not an architect's section line). Cut elements hatched / filled; the model beyond the cut in line work.
2. Levels above GF FFL.
3. ICF: Nudura 6" XR35, 101.6 EPS + 152.4 core + 101.6 EPS = 355.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8, 152.4 core + 101.6 EPS = 355.6. No structural design yet (planning drawings). ICF per the quotation model: 6in XR35 external walls and foundation (2 courses on a strip footing), 6in Std separating walls (stair core + flat separating walls). Precast floors bear on the ICF core; transfer beams under the 1F north wall and the wing east wall, the indicative steels and the Class 2A ties for the engineer.
4. Steel marks, BOS / TOS: rev -. See ES26-087-GA-01 / EL-01 / EL-02 in the approval drawings pack.

### REVISIONS

| REV | DATE | DESCRIPTION |
|---|---|---|
| - | 02.11.26 | Quotation issue |

Nudura™ BuildEase

| CLIENT | PROJECT |
|---|---|
| JAUS (via Tremco CPG UK) | Bromfelde Corner, 25 Bromfelde Road, London SW4 6PP |

DRAWING TITLE
**SECTION A-A**
ICF section with levels and build-ups

| SCALE | SIZE | DATE |
|---|---|---|
| 1:75 | A3 | 02.11.26 |
| DRAWN | CHECKED | APPROVED |
| TS | | |

| STATUS | DRAWING No. | REV |
|---|---|---|
| QUOTATION | ES26-087-SE-01 | - |