
SUPPLY SCOPE: Nudura ICF forms, accessories, pre-cut service, alignment hire and haulage as the quotation. ENGLAND - Building Regulations (LABC). 3rd-floor FFL ~8.23 m above the ground floor, below 11 m. 4 storeys incl. the attic (LABC warranty cap 3 - provider to confirm); Class 2A ties by the engineer. Precast floors, steels / transfer beams, roof structure, windows and timber partitions are shown in good faith for coordination only - engineer / specialists to design.

QUOTATION - NOT FOR CONSTRUCTION

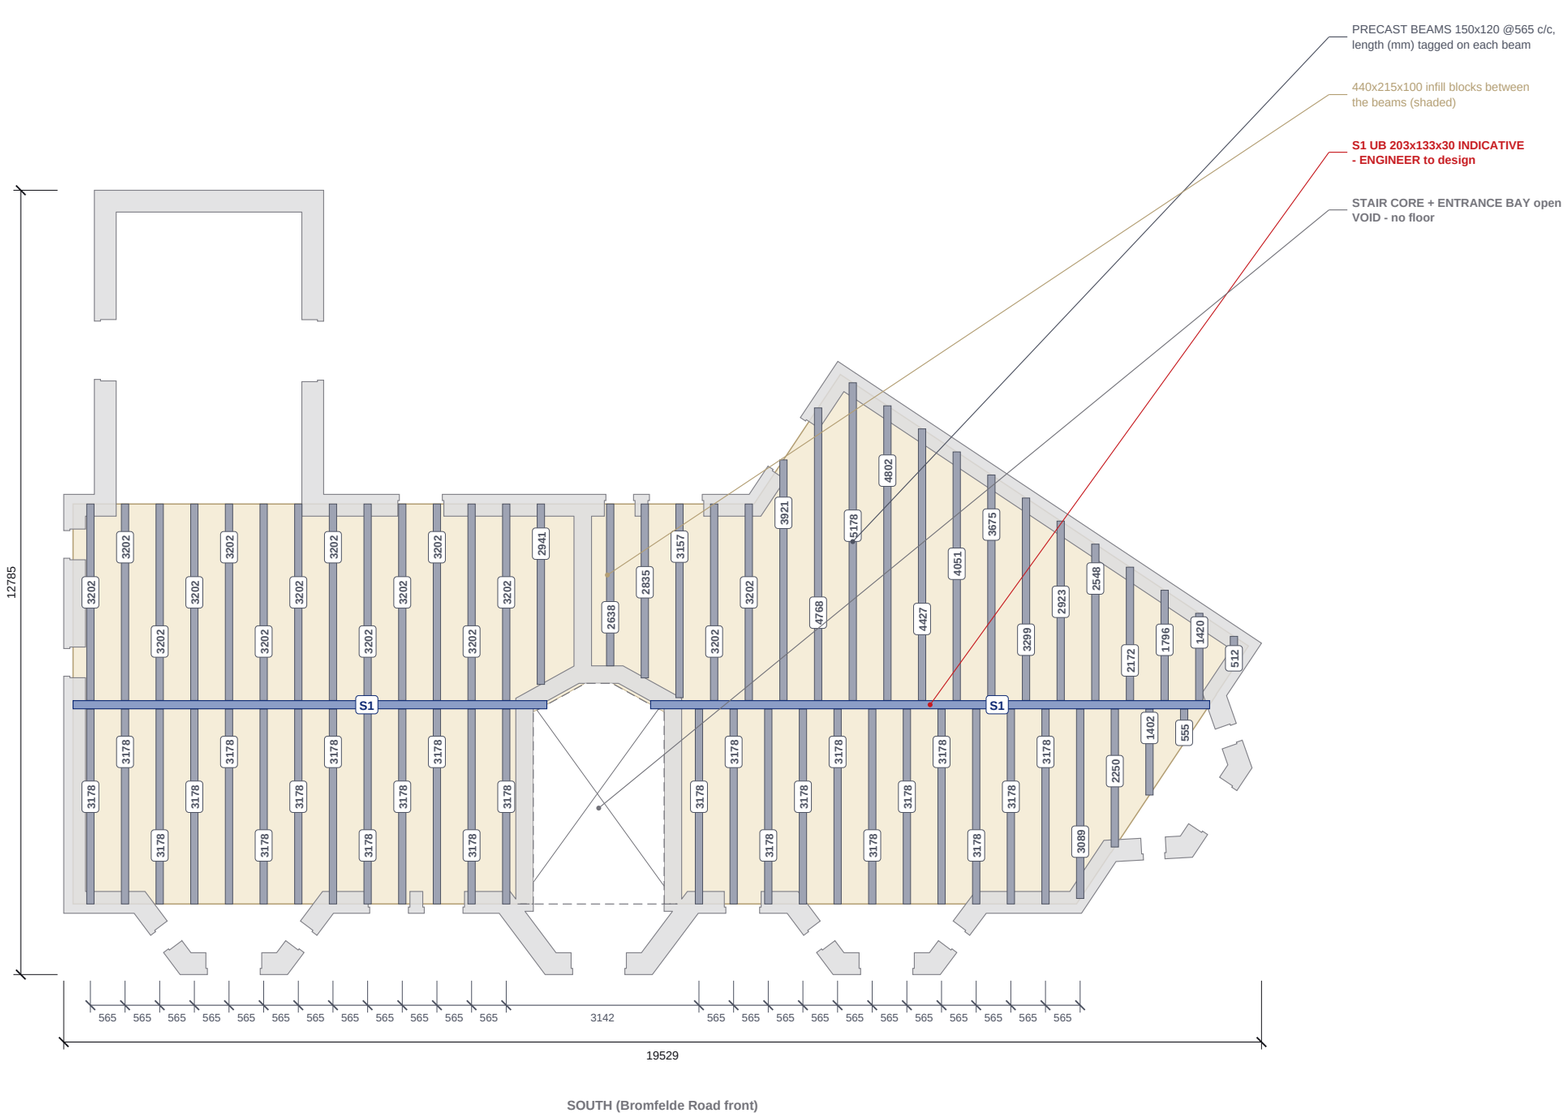

Precast beam 150x120 | Infill block zone (floor outline) | ICF walls below (bearing)
UB steel (indicative - engineer) | Void - no floor

SECOND FLOOR PRECAST BEAM AND BLOCK LAYOUT

Scale 1:100 @ A3 | Plan on the beams, screed / topping omitted. Walls below cut at +4,800

0 1 2 3 4 5m

Do not scale. All dimensions in mm. Check all dimensions on site.

SECOND FLOOR SCHEDULES

FLOOR BUILD-UP

Layer	mm	Underside / level
FFL	-	+5,486.4
Levelling screed	25	+5,461.4
Structural topping	100.0	+5,361.4
Precast beam 150x120 + 100 infill	150	+5,211.4

FLOOR SUMMARY

Item	Qty
Floor area (m2)	112.6
Precast beams 150x120 @565 (No.)	61
Beam run (m)	188.7
Infill blocks 440x215x100 (No., +5%)	974
Max clear span (mm)	4,978
Topping 100.0 + screed 25 (m2)	112.6

Infill = floor area / (0.565 x 0.215) + 5%, indicative - supplier to confirm.

STEELS / SLEEPER WALLS (INDICATIVE - ENGINEER)

Mark	Section	Line	Length	kg
S1	UB 203x133x30	y 3,400	7,725	232
S1	UB 203x133x30	y 3,400	9,115	273
	Total steel (indicative)			**505**

BEAM SCHEDULE (LENGTH / QTY)

Length	Qty	Length	Qty
5,178	1	2,923	1
4,802	1	2,835	1
4,768	1	2,638	1
4,427	1	2,548	1
4,051	1	2,250	1
3,921	1	2,172	1
3,675	1	1,796	1
3,299	1	1,420	1
3,202	15	1,402	1
3,178	24	555	1
3,157	1	512	1
3,089	1	Total	61
2,941	1		

Lengths as modelled (beam overall incl. bearings). Supplier to confirm / cut to its own increments.

NOTES

1. Second floor FFL +5,486.4: 25 levelling screed on 100.0 structural topping on 150 precast beams (120 wide) @565 c/c + 440x215x100 infill blocks; beam top +5,361.4, soffit +5,211.4 (partition heads below are clipped to this soffit).
2. Beams bear on the ICF core of the walls below (grey, cut at +4,800) - minimum bearing, end details and any ties to the precast supplier. 61 beams, 188.7 m; max clear span 4,978 (none over 5 m).
3. STEELS S1 UB 203x133x30 INDICATIVE - engineer to design: S1 = intermediate beam bearing line. Sections, padstones, bearings into the ICF and fire protection to the engineer.
4. VOIDS (no floor): stair core + entrance bay open (no floor); trimming / edge beams to the precast supplier.
5. Precast supplier to design and confirm the beams, infill, bearings and layout; drawn for pricing / coordination only. Levels above GF FFL, mm.

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	Quotation issue

Nudura™ BuildEase

CLIENT	PROJECT
JAUS (via Tremco CPG UK)	Bromfelde Corner, 25 Bromfelde Road, London SW4 6PP

DRAWING TITLE
SECOND FLOOR STRUCTURE

Precast beam and block layout, beam lengths, steels, voids

SCALE	SIZE	DATE
1:100	A3	02.11.26
DRAWN	**CHECKED**	**APPROVED**
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-087-FL-03	-