
**SUPPLY SCOPE: Nudura ICF forms, accessories, pre-cut service, alignment hire and haulage as the quotation. ENGLAND - Building Regulations (LABC). 3rd-floor FFL ~8.23 m above the ground floor, below 11 m. 4 storeys incl. the attic (LABC warranty cap 3 - provider to confirm); Class 2A ties by the engineer. Precast floors, steels / transfer beams, roof structure, windows and timber partitions are shown in good faith for coordination only - engineer / specialists to design.**

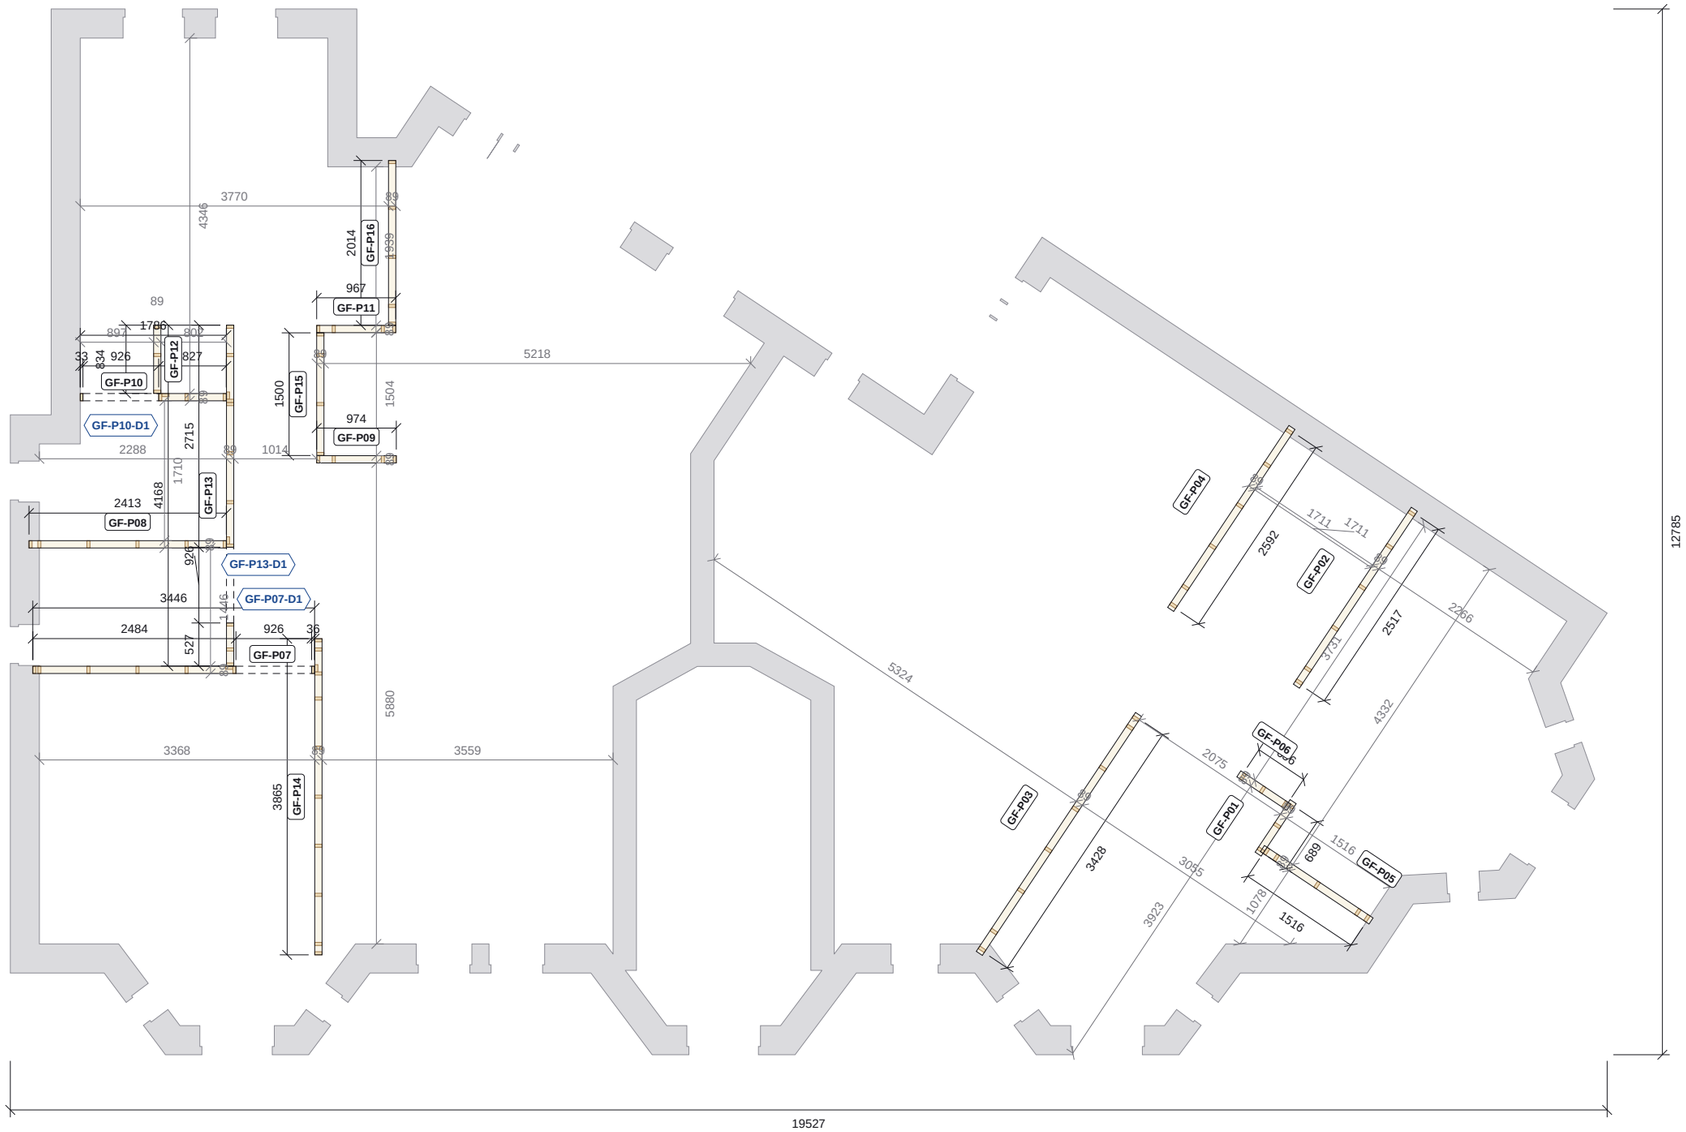


## GROUND FLOOR TIMBER PARTITIONS PLAN

Scale 1:75 @ A3 | Plan cut at 1200 above GF FFL

0 1 2 3 4 5m

Partition panel, studs cut at plan level | Panel joint | Nudura ICF shell (context only) | Door opening, head over

**QUOTATION - NOT FOR CONSTRUCTION**

Do not scale. All dimensions in mm. Check all dimensions on site.

## GROUND FLOOR SCHEDULES

### PARTITION SCHEDULE

| Panel | Head | C16 studs | Use | Length | Doors |
|---|---|---|---|---|---|
| GF-P01 | 2,463 | 38x89 @600 | partition | 689 | - |
| GF-P02 | 2,463 | 38x89 @600 | partition | 2517 | - |
| GF-P03 | 2,463 | 38x89 @600 | partition | 3428 | - |
| GF-P04 | 2,463 | 38x89 @600 | partition | 2592 | - |
| GF-P05 | 2,463 | 38x89 @600 | partition | 1516 | - |
| GF-P06 | 2,463 | 38x89 @600 | partition | 656 | - |
| GF-P07 | 2,463 | 38x89 @600 | partition | 3446 | GF-P07-D1 |
| GF-P08 | 2,463 | 38x89 @600 | partition | 2413 | - |
| GF-P09 | 2,463 | 38x89 @600 | partition | 974 | - |
| GF-P10 | 2,463 | 38x89 @600 | partition | 1786 | GF-P10-D1 |
| GF-P11 | 2,463 | 38x89 @600 | partition | 967 | - |
| GF-P12 | 2,463 | 38x89 @600 | partition | 834 | - |
| GF-P13 | 2,463 | 38x89 @600 | partition | 4168 | GF-P13-D1 |
| GF-P14 | 2,463 | 38x89 @600 | partition | 3865 | - |
| GF-P15 | 2,463 | 38x89 @600 | partition | 1500 | - |
| GF-P16 | 2,463 | 38x89 @600 | partition | 2014 | - |

Length along the wall (mm). Head = top of frame above GF FFL (z 0), 5 under the first floor precast beam soffit +2,558.2.

### DOOR OPENING SCHEDULE

| Label | Width | Height | Head |
|---|---|---|---|
| GF-P07-D1 | 926 | 2100 | 2100 |
| GF-P10-D1 | 926 | 2100 | 2100 |

| Label | Width | Height | Head |
|---|---|---|---|
| GF-P13-D1 | 926 | 2100 | 2100 |

Structural opening sizes. Head level above underside of the bottom rail.

### PARTITION TIMBER (GROUND FLOOR)

| Section | Pieces | Run m | 4.8m lengths |
|---|---|---|---|
| 38x89 C16 | 208 | 315.9 | 70 |
| 36x89 C16 | 1 | 2.4 | 1 |
| 33x89 C16 | 1 | 2.4 | 1 |
| Slotted deflection head clip | 158 | - | - |

From the model. 4.8m lengths = run / 4.8 +5%, not cut-optimised.

### NOTES

1. Non-load-bearing internal partitions (TLSTF): 38x89 C16 studs @600, 38x89 head and bottom rails, 15 plasterboard each side (119). No wet-room pattresses modelled - sanitaryware / wall-hung fixings to the fit-out spec.
2. External + separating walls Nudura ICF (grey), context only - read with the ICF drawings. Set-out strings in grey. Partitions are set out on two grids: H/V and the rotated wing grid (56.3 deg, 6 No. on this level) - set out from the ICF faces.
3. Non-load-bearing: heads stop 5 short of the first floor PRECAST BEAM SOFFIT (+2,558.2; frame top +2,553.2), restrained with galv slotted deflection head clips fixed to the soffit (158 No., 5 mm deflection gap) - clip product and fixing into the beams / infill blocks to confirm with the precast supplier. Beam layout on ES26-087-FL-02.
4. Base = GF FFL +0.0. Sole plates fixed down at <= 600 c/c through the 50 screed to the beam-and-block deck, DPC under (fixings to the precast supplier). Door openings are structural opening sizes. Dimensions to timber frame faces; check all dimensions on site.

### REVISIONS

| REV | DATE | DESCRIPTION |
|---|---|---|
| - | 02.11.26 | Quotation issue |

Nudura™ BuildEase

| CLIENT | PROJECT |
|---|---|
| JAUS (via Tremco CPG UK) | Bromfelde Corner, 25 Bromfelde Road, London SW4 6PP |

DRAWING TITLE

**GROUND FLOOR TIMBER PARTITIONS**

Internal stud partitions, panels and door openings

| SCALE | SIZE | DATE |
|---|---|---|
| 1:75 | A3 | 02.11.26 |
| DRAWN | CHECKED | APPROVED |
| TS | | |

| STATUS | DRAWING No. | REV |
|---|---|---|
| QUOTATION | ES26-087-TF-01 | - |