
SUPPLY SCOPE: Nudura ICF forms, accessories, pre-cut service, alignment hire and haulage as the quotation. ENGLAND - Building Regulations (LABC). 3rd-floor FFL ~8.23 m above the ground floor, below 11 m. 4 storeys incl. the attic (LABC warranty cap 3 - provider to confirm); Class 2A ties by the engineer. Precast floors, steels / transfer beams, roof structure, windows and timber partitions are shown in good faith for coordination only - engineer / specialists to design.

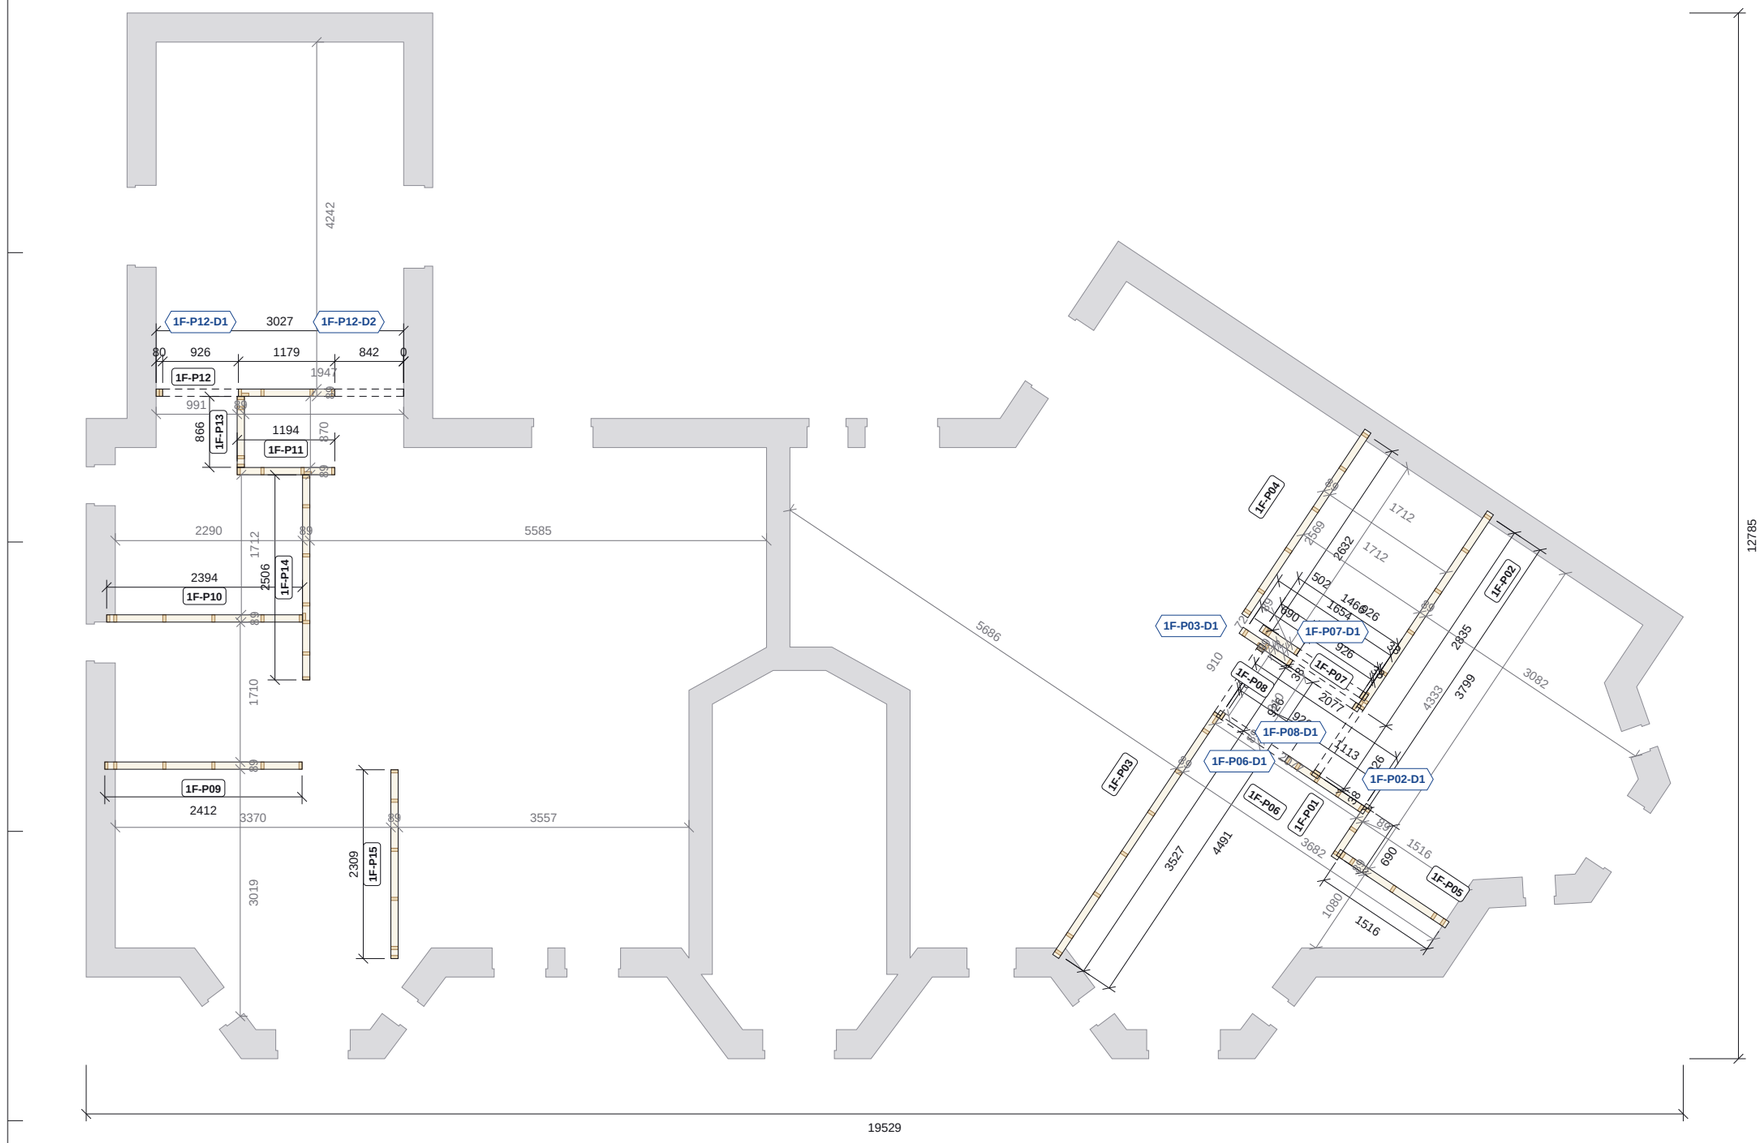

FIRST FLOOR TIMBER PARTITIONS PLAN

Scale 1:75 @ A3 | Plan cut at 1200 above 1F FFL

0 1 2 3 4 5m

Partition panel, studs cut at plan level | Panel joint | Nudura ICF shell (context only) | Door opening, head over

QUOTATION - NOT FOR CONSTRUCTION

Do not scale. All dimensions in mm. Check all dimensions on site.

FIRST FLOOR SCHEDULES

PARTITION SCHEDULE

Panel	Head	C16 studs	Use	Length	Doors
1F-P01	5,206	38x89 @600	partition	690	-
1F-P02	5,206	38x89 @600	partition	3799	1F-P02-D1
1F-P03	5,206	38x89 @600	partition	4491	1F-P03-D1
1F-P04	5,206	38x89 @600	partition	2632	-
1F-P05	5,206	38x89 @600	partition	1516	-
1F-P06	5,206	38x89 @600	partition	2077	1F-P06-D1
1F-P07	5,206	38x89 @600	partition	1654	1F-P07-D1
1F-P08	5,206	38x89 @600	partition	1466	1F-P08-D1
1F-P09	5,206	38x89 @600	partition	2412	-
1F-P10	5,206	38x89 @600	partition	2394	-
1F-P11	5,206	38x89 @600	partition	1194	-
1F-P12	5,206	38x89 @600	partition	3027	1F-P12-D1, 1F-P12-D2
1F-P13	5,206	38x89 @600	partition	866	-
1F-P14	5,206	38x89 @600	partition	2506	-
1F-P15	5,206	38x89 @600	partition	2309	-

Length along the wall (mm). Head = top of frame above GF FFL (z 0), 5 under the second floor precast beam soffit +5,301.4.

DOOR OPENING SCHEDULE

Label	Width	Height	Head
1F-P02-D1	926	2100	2100
1F-P03-D1	926	2100	2100
1F-P06-D1	926	2100	2100
1F-P07-D1	926	2100	2100

Label	Width	Height	Head
1F-P08-D1	926	2100	2100
1F-P12-D1	926	2100	2100
1F-P12-D2	842	2100	2100

Structural opening sizes. Head level above underside of the bottom rail.

PARTITION TIMBER (FIRST FLOOR)

Section	Pieces	Run m	4.8m lengths
38x89 C16	219	309.1	68
36x89 C16	5	11.9	3
Slotted deflection head clip	140	-	-

From the model. 4.8m lengths = run / 4.8 +5%, not cut-optimised.

NOTES

1. Non-load-bearing internal partitions (TLSTF): 38x89 C16 studs @600, 38x89 head and bottom rails, 15 plasterboard each side (119). No wet-room pattresses modelled - sanitaryware / wall-hung fixings to the fit-out spec.
2. External + separating walls Nudura ICF (grey), context only - read with the ICF drawings. Set-out strings in grey. Partitions are set out on two grids: H/V and the rotated wing grid (56.3 deg, 8 No. on this level) - set out from the ICF faces.
3. Non-load-bearing: heads stop 5 short of the second floor PRECAST BEAM SOFFIT (+5,301.4; frame top +5,296.4), restrained with galv slotted deflection head clips fixed to the soffit (140 No., 5 mm deflection gap) - clip product and fixing into the beams / infill blocks to confirm with the precast supplier. Beam layout on ES26-087-FL-03.
4. Base = 1F FFL +2,743.2. Sole plates fixed down at <= 600 c/c through the 25 levelling screed to the structural topping (fixings to the precast supplier). Door openings are structural opening sizes. Dimensions to timber frame faces; check all dimensions on site.

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	Quotation issue

Nudura™ BuildEase

CLIENT	PROJECT
JAUS (via Tremco CPG UK)	Bromfelde Corner, 25 Bromfelde Road, London SW4 6PP

DRAWING TITLE

FIRST FLOOR TIMBER PARTITIONS

Internal stud partitions, panels and door openings

SCALE	SIZE	DATE
1:75	A3	02.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-087-TF-02	-