
SUPPLY SCOPE: Nudura ICF forms, accessories, pre-cut service, alignment hire and haulage as the quotation. ENGLAND - Building Regulations (LABC). 3rd-floor FFL ~8.23 m above the ground floor, below 11 m. 4 storeys incl. the attic (LABC warranty cap 3 - provider to confirm); Class 2A ties by the engineer. Precast floors, steels / transfer beams, roof structure, windows and timber partitions are shown in good faith for coordination only - engineer / specialists to design.

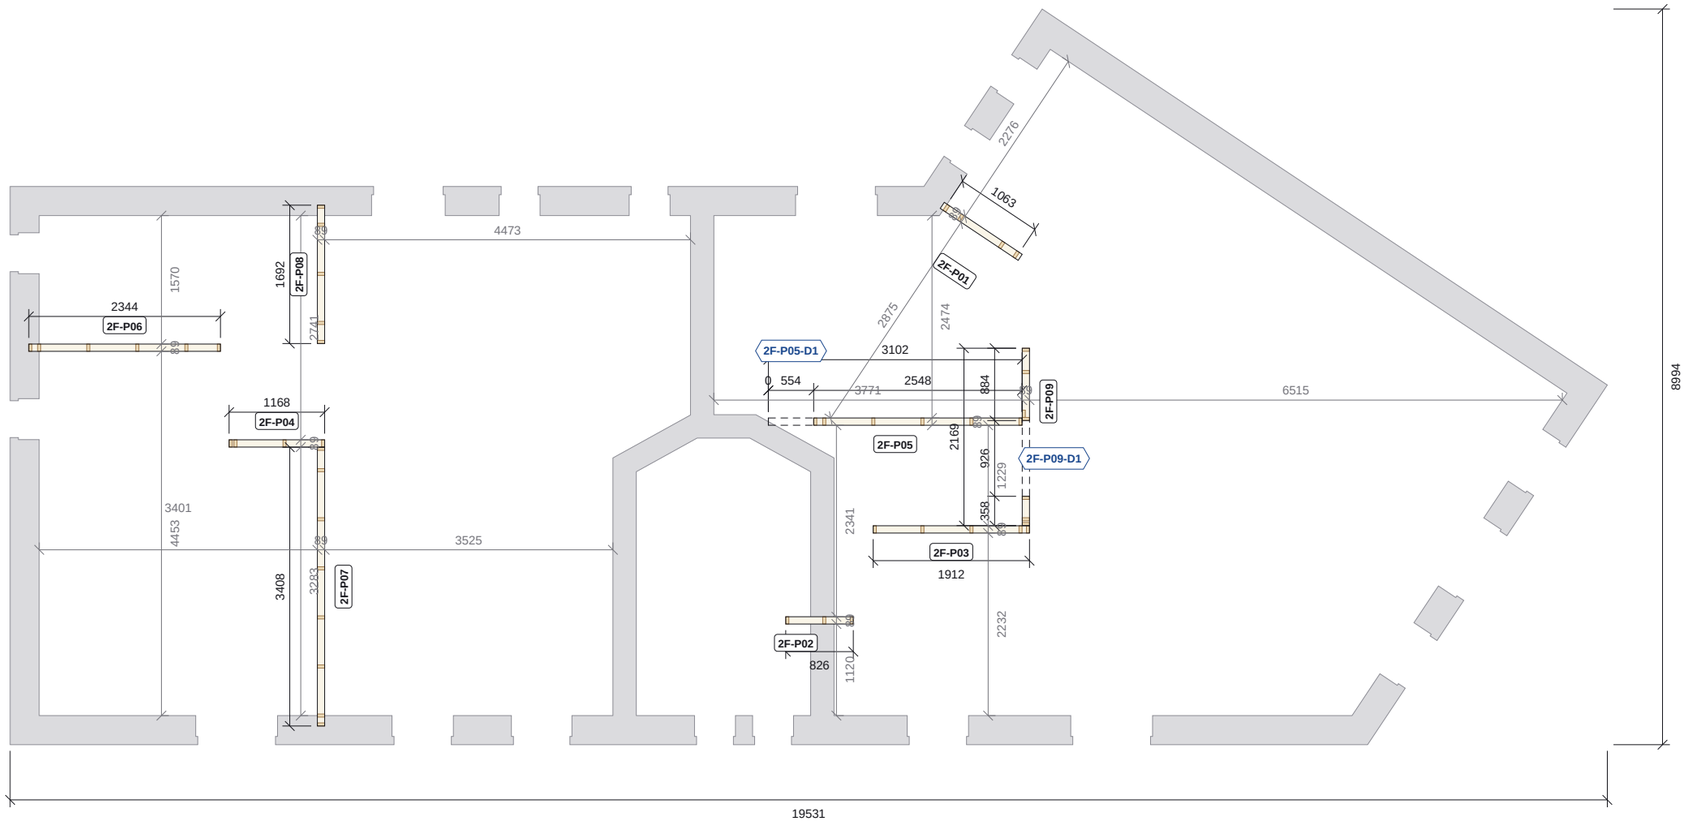

SECOND FLOOR TIMBER PARTITIONS PLAN

Scale 1:75 @ A3 | Plan cut at 1200 above 2F FFL

0 1 2 3 4 5m

Partition panel, studs cut at plan level | Panel joint | Nudura ICF shell (context only) | Door opening, head over

QUOTATION - NOT FOR CONSTRUCTION

Do not scale. All dimensions in mm. Check all dimensions on site.

SECOND FLOOR SCHEDULES

PARTITION SCHEDULE

Panel	Head	C16 studs	Use	Length	Doors
2F-P01	7,950	38x89 @600	partition	1063	-
2F-P02	7,950	38x89 @600	partition	826	-
2F-P03	7,950	38x89 @600	partition	1912	-
2F-P04	7,950	38x89 @600	partition	1168	-
2F-P05	7,950	38x89 @600	partition	3102	2F-P05-D1
2F-P06	7,950	38x89 @600	partition	2344	-
2F-P07	7,950	38x89 @600	partition	3408	-
2F-P08	7,950	38x89 @600	partition	1692	-
2F-P09	7,950	38x89 @600	partition	2169	2F-P09-D1

Length along the wall (mm). Head = top of frame above GF FFL (z 0), 5 under the third floor precast beam soffit +8,044.6.

DOOR OPENING SCHEDULE

Label	Width	Height	Head
2F-P05-D1	554	2100	2100

Label	Width	Height	Head
2F-P09-D1	926	2100	2100

Structural opening sizes. Head level above underside of the bottom rail.

PARTITION TIMBER (SECOND FLOOR)

Section	Pieces	Run m	4.8m lengths
38x89 C16	114	167.4	37
Slotted deflection head clip	82	-	-

From the model. 4.8m lengths = run / 4.8 +5%, not cut-optimised.

NOTES

1. Non-load-bearing internal partitions (TLSTF): 38x89 C16 studs @600, 38x89 head and bottom rails, 15 plasterboard each side (119). No wet-room pattresses modelled - sanitaryware / wall-hung fixings to the fit-out spec.
2. External + separating walls Nudura ICF (grey), context only - read with the ICF drawings. Set-out strings in grey. Partitions are set out on two grids: H/V and the rotated wing grid (56.3 deg, 1 No. on this level) - set out from the ICF faces.
3. Non-load-bearing: heads stop 5 short of the third floor PRECAST BEAM SOFFIT (+8,044.6; frame top +8,039.6), restrained with galv slotted deflection head clips fixed to the soffit (82 No., 5 mm deflection gap) - clip product and fixing into the beams / infill blocks to confirm with the precast supplier. Beam layout on ES26-087-FL-04.
4. Base = 2F FFL +5,486.4. Sole plates fixed down at <= 600 c/c through the 25 levelling screed to the structural topping (fixings to the precast supplier). Door openings are structural opening sizes. Dimensions to timber frame faces; check all dimensions on site.

REVISIONS

REV	DATE	DESCRIPTION
-	02.11.26	Quotation issue

Nudura™ BuildEase

CLIENT	PROJECT
JAUS (via Tremco CPG UK)	Bromfelde Corner, 25 Bromfelde Road, London SW4 6PP

DRAWING TITLE

SECOND FLOOR TIMBER PARTITIONS

Internal stud partitions, panels and door openings

SCALE	SIZE	DATE
1:75	A3	02.11.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-087-TF-03	-